

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of	)	
	)	
Peter GALYAS, et al	)	Group Art Unit: 2681
	)	
Application No.: 09/732,353	)	Examiner: Unassigned
	)	
Filed: December 7, 2000	)	
	)	
For: System and Method Relating to Digital	)	
Mobile Communication Systems	)	

**CLAIM FOR CONVENTION PRIORITY**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The benefit of the filing date of the following prior foreign application in the following foreign country is hereby requested, and the right of priority provided in 35 U.S.C. § 119 is hereby claimed:

Swedish Patent Application No. 9904632-8


Filed: December 17, 1999

In support of this claim, enclosed is a certified copy of the prior foreign application. The prior foreign application referred to in the oath or declaration. Acknowledgment of receipt of the certified copy is requested.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

Date: FEBRUARY 23, 2001

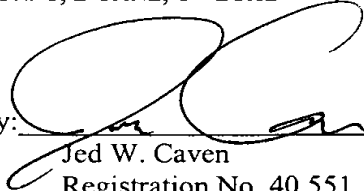By:   
Jed W. Caven  
Registration No. 40,551

P.O. Box 1404  
Alexandria, Virginia 22313-1404  
(919) 941-9240

# PRV

PATENT- OCH REGISTRERINGSVERKET

Patentavdelningen

## Intyg Certificate



*Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.*

*This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.*

(71) *Sökande*                      *Telefonaktiebolaget L M Ericsson, Stockholm SE*  
*Applicant (s)*

(21) *Patentansökningsnummer*      *9904632-8*  
*Patent application number*

(86) *Ingivningsdatum*                      *1999-12-17*  
*Date of filing*

*Stockholm, 2000-10-30*

*För Patent- och registreringsverket*  
*For the Patent- and Registration Office*

*Therese Friberger*

*Therese Friberger*

*Avgift*  
*Fee*                      *170:-*

E29 P93SE AB/ej 1999-12-13

Title:

5 A SYSTEM AND A METHOD RELATING TO DIGITAL MOBILE COMMUNICATION  
SYSTEMS

# TECHNICAL FIELD OF THE INVENTION

10 The present invention relates to transmission of data in digital  
mobile communication systems, in particular to a system and a  
method for non-transparent transmission of data in digital mobile  
communications system.

## STATE OF THE ART

15 In digital mobile communication systems data can be transmitted  
physically in two different manners, namely transparently and non-  
transparently. For transparent transmissions, data is transferred  
transparently over a traffic channel of the mobile communication  
system which means that error correction on the radio path is  
performed through the use of channel coding only. For example for  
20 the GSM system a channel coding scheme denoted Forward Error  
Correction (FEC) is used.

25 For non-transparent transmissions, in addition to channel coding  
as referred to above, a further protocol is used according to  
which the data transmission over the traffic channel is repeated  
if the data was not received correctly at the receiving side. In  
the GSM system such further communication protocol is denoted  
Radio Link Protocol (RLP). It is used between terminal adapting  
means of a mobile station and network adapting means, e.g. an  
30 InterWorking Function IWF, which mostly is provided at a Mobile  
Switching Center MSC, or in association therewith. The RLP is a  
balanced data transfer protocol of HDLC type which has a frame  
structure. Error correction by the RLP is based on re-transmission

of frames corrupted over the traffic channel. There is also another protocol L2R (Layer 2 Relay) above the RLP. Generally there are functional means both in the mobile station (i.e. in its terminal adapter) and in the Inter Working Function handling such  
5 protocol. Data is normally transported in RLP frames over the radio interface between the functional means handling the RLP protocol in the mobile station and in an IWF, respectively. In a normal data transfer state, i.e. for the 9,6 kbps channel that uses 12 kbps on the radio channel, the functional means provides  
10 for packing the data into 200-bit PDU:s- (Packet Data units) transferred in 240 bit RLP-frames over the radio interface to another functional means.

So called Discontinuous Transmission (DTX) is advantageously  
15 applied when there is no data or other information to be transferred. DTX is a method for reducing transmission on the radio path as much as possible when there is actually no data to be transferred, which means that the transmission is interrupted. The reason for using DTX is to reduce power consumption in the  
20 transmitting means, which is of the utmost importance for mobile stations, and also to reduce the overall interference level on the radio path. DTX operates in an independent manner for the uplink and for the downlink, respectively. DTX may be implemented or not in a mobile communications network, i.e. either the network allows  
25 DTX or not.

In mobile communication systems implementing TDMA (Time Division  
30 Multiplex Access) e.g. GSM, each mobile station is assigned one traffic channel for transmission of speech or data. There can thus be maximum eight parallel connections to different mobile stations on one and the same carrier wave for fullrate transmission. Therefore the maximum transfer rate for data is limited to quite a low level due to the available bandwidth, the

channel coding and the error correction; thus for the GSM system it is limited to 14.5 kbps, (12 kbps, 6 kbps or 3.6 kbps). However, in e.g. GSM all terrestrial transmission is based on circuit switched transmission.

5

Through the introduction of GPRS (the packet data service for GSM, General Packet Radio Service), EDGE (Enhanced Data Rates For Global Evolution) and Adaptive Multi Rate (AMR) speech codecs in GSM the bandwidth can be increased and varied. The transmission structure within the Base Station Subsystem (BSS), however, has not been changed in order to be able to take advantage of such development. For private networks or for office solutions, GSM systems are evolving which use the normal LAN (Local Area Network)/Intranet within the company, i.e. IP based transmission is used. However, the QoS issue is not addressed in any other manner than through over-provisioning within an office or with any other QoS mechanisms supported by the computer LAN infrastructure. The bandwidth is also cheap using LAN/Ethernet technologies. However, for public solutions the situation is different and the bandwidth is expensive.

20

For transmission of non-transparent data within GSM, DTX is supported which means if there is no data to be sent, the radio transmitter can be turned off. In GSM all terrestrial transmission is actually based on circuit switched transmission. Through the introduction of GPRS, the current GSM system is actually upgraded to support packet switched services over the radio interface. Thus a DTX functionality can be used for statistical multiplexing between mobile station and the BTS (Base Transceiver Station), i.e. on the radio path. For the terrestrial transmission packet switching is being defined within the GPRS Core network and the interface (Gb) to BSS (Base Station Subsystem).

25

30

In GSM a so called Transcoder and Rate Adaptor Unit, TRAU, which is a transcoder unit that may be arranged apart from the base station, is provided. TRAU communicates with the channel coding unit for example of a BTS which communication is defined in GSM recommendation 08.60. On the uplink direction the BTS always sends the frames received over the radio interface. On the downlink direction the Inter Working Function IWF, which generally is provided in the MSC, which comprises network adapting functionality, indicates whether the frame shall be sent or not by inband signalling within the Radio Link Protocol RLP, frames that are always sent to the BTS via TRAU. As can be seen, much idle data is sent which is a waste of resources.

Through the introduction of High Speed Circuit Switched Data, HSCSD, it gets possible to use several Time Slots (TSs) on the radio interface to one mobile station. Transmission can be transparent as well as non-transparent. For transparent services, the number of TSs are the same on the uplink and on the downlink. For non-transparent transmission there also exists asymmetrical usage of the TSs. The reason therefore is that the typical data services like web-browsing are highly asymmetrical and that the MS implementation faces a threshold in cost if data has to be sent and received at the same time. Therefor most HSCSD MSs will support asymmetrical use of times slots with the relations 1/1, 1/2, 2/2, 1/3, 1/4 meaning one time slot on the uplink, one on the downlink, one on the uplink, two on the downlink etc. Non-transparent services also have the advantage over transparent services that they include the possibility of adaptive radio resource handling. This means that a data user is guaranteed the connection on one time slot and addition thereto can use available radio resources in the cell. The case is similar for GPRS wherein the MS only uses the radio resources when needed. Also here the

usage can be asymmetrical. The MS design problems are similar to HSCSD.

To summarize, currently there is no satisfactory solution as to how to provide for an efficient usage of resources, e.g. on the fixed or terrestrial connection between base station and switching arrangement when packet based services are introduced.

# SUMMARY OF THE INVENTION

What is needed is therefore a communication system supporting communication of data which has a transmission efficiency which is increased as compared to hitherto known systems. Particularly, a system is needed, through which the fixed connection can be used more efficiently for non-transparent data transmission. Further yet a system is needed through which bandwidth can be used efficiently and which is cheap and easy to implement. Moreover, a method for transmission of data in a mobile communication system is needed, through which the above mentioned objects can be fulfilled.

20

Therefor a mobile communication system supporting communication of data is provided which comprises at least one base station connected to a switching arrangement over a connection and uses a communication protocol for communication between a mobile station and the switching arrangement. The connection between the base station and the switching arrangement supports packet switched communication of data and means are provided for detecting in the base station if data frames sent from the mobile station are correctly received over the air interface. Moreover means are provided for sending only data frames detected as correctly received on to the switching arrangement using the packet switched connection between the base station and the switching arrangement.

25

30

Particularly non-transparent communication of data transported as data frames is established on the uplink from the mobile station. Further still the means for detecting in a preferred embodiment comprises means for calculating a frame checksum for a received data frame. In an alternative implementation the quality of the radio transmission is detected in the base station to detect if a data frame is correctly received. This can be done as an alternative to, or, in combination with, the calculation of a frame checksum. In one implementation the switching arrangement is a Mobile Switching Center (MSC).

Alternatively the switching arrangement is a Base Station Controller (BSC), the base station is a Base Transceiver Station (BTS) and packet switched communication of data is supported at least on the uplink between the Base Transceiver Station (BTS) and the Base Station Controller (BSC).

Particularly the BSC includes transcoding and adapting means for communication with an interworking function of a mobile switching center which comprises means for building frames for transportation of data, the transcoding and adapting means detecting if frames received from the mobile switching center contain data and sending only data frames on to the base station. In an advantageous implementation packet switched communication of data is supported between the base station and the switching arrangement also on the downlink.

The inventive concept is also applicable to a mobile communication system supporting communication of packet data. The system comprises at least one base station connected to a switching arrangement over a connection and a uses communication protocol for communication between the mobile station and the switching arrangement.



The connection between the base station and the switching arrangement supports packet switched communication of data and means are provided for detecting in the base station if data frames sent from the mobile station are correctly received over the air interface. Moreover means are provided for sending only data frames detected as correctly received on to the switching arrangement using the packet switched connection between the base station and the switching arrangement. Advantageously the means for detecting comprises means for calculating a frame checksum for a received data frame.

Particularly non-transparent communication of packet data is supported and packet switched communication is supported also on the downlink from the switching arrangement to the base station.

According to the present invention it is suggested to introduce packet switched transmission within the BSS in order to increase the flexibility in the transmission efficiency when using statistical multiplexing. It is particularly suggested to use the Internet Protocol (IP). Other alternatives are for example to use ATM (Asynchronous Transfer Mode) or Frame Relay. To introduce Quality of Service (QoS) in an IP network a standard called Differentiated Services is evolving which is based on using priority bits in the IP header. The standard is being standardised by IETF (Internet Engineering Task Force), cf. RFC (Request For Comment) 2475, "An architecture for differentiated services." However, when packet based transmission is introduced into GSM BSS, it is required that it be possible to meet the current delay requirements of GSM, speech being the most delay sensitive traffic and has to be put in the highest delay priority class. Other services, for which the delay requirements are less strict, will

be assigned a lower priority class, e.g. non-transparent data, which have a variable delay by default.

Particularly, for non-transparent data it is allowed for DTX to be  
 5 used for statistical multiplexing on the fixed connection, which  
 is extremely advantageous. Even more particularly, DTX can be used  
 for statistical multiplexing between the BTS (in GSM) and the TRAU  
 (Transcoder and Rate Adaptor Unit) in BSC. Even more particularly  
 it may be implemented between BTS and MSC. For GPRS the inventive  
 10 concept can be implemented between BTS and SGSN or BTS and BSC.  
 The TRAU of GSM here corresponds to PCU that may be located either  
 in BSC or SGSN.

To meet the above mentioned objects a method of transmitting data  
 15 in a mobile communication system is provided. The method comprises  
 the steps of; establishing a non-transparent data connection  
 between a mobile station and a switching arrangement, comprising  
 an air interface between the mobile station and a base station and  
 a packet switched connection between the base station and the  
 20 switching arrangement; detecting in the base station if data  
 frames sent from the mobile station are correctly received over  
 the air interface; and sending only data frames detected as  
 correctly received on to the switching arrangement using the  
 packet switched connection between the base station and the  
 25 switching arrangement. In a preferred embodiment the step of  
 detecting comprises using a frame checksum defined in the non-  
 transparent data protocol to establish if the data frames are  
 correctly received.

As an alternative, or an additional, step, the method comprises  
 30 the step of; performing radio quality measurements in the base  
 station to establish if data frames are correctly received over  
 the air interface from the mobile station. In a particular

implementation the method further comprises the step of; detecting  
in the base station if a received time slot from the mobile  
station is symmetrical, and, only if the time slot is symmetrical,  
sending data packets over the packet switched connection to the  
5 switching arrangement.

In an advantageous implementation the method includes the step of;  
implementing packet switched transmission also on the downlink  
from the switching arrangement to the base station.

10

The invention concept is also applicable to a mobile communication  
system supporting communication of packet data. The method then  
comprises the steps of; establishing a non-transparent data  
connection between a mobile station and a switching arrangement,  
15 comprising an air interface between the mobile station and a base  
station and a packet switched connection between the base station  
and the switching arrangement; detecting in the base station if  
data frames sent from the mobile station are correctly received  
over the air interface; and sending only data frames detected as  
20 correctly received on to the switching arrangement using the  
packet switched connection between the base station and the  
switching arrangement.

Particularly the step of detecting comprises using a frame  
25 checksum, defined in the non-transparent data protocol, to  
establish if the data frames are correctly received. Moreover, in  
an advantageous implementation, the method also comprises the step  
of; implementing packet switched transmission on the downlink from  
the switching arrangement to the base station. Substantially the  
30 same inventive procedure as described more in detail with  
reference to the uplink is also implemented for the downlink in  
advantageous embodiments.

30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995  
1000

Particularly the inventive concept is applicable to circuit switched data and packet switched data (GPRS), single and multislots, in any combination, and to packet based transmission in the radio access network.

5

Moreover, the invention also covers all kinds of mapping between radiocarrier (circuit switched (CS) or packet switched (PS) solutions) and core network (CS or PS). This is actually the case for UMTS (Universal Mobile Telephone System) and can also be  
10 implemented for GSM/GPRS/EDGE. Thus a circuit switched radio channel can be connected to the packet switched core network of GPRS or a GPRS packet switched radio channel can be connected to a circuit switched carrier of the circuit switched core network of e.g. GSM. What is implemented depends only on the requirements  
15 imposed by the implemented service. Thus could e.g. GSM-interfaces A and Gb be migrated to the In-interface of UMTS.

It is an advantage of the invention that the overall flexibility and transmission efficiency is considerably increased.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will in the following be more thoroughly described in a non-limiting manner and with reference to the accompanying drawings, in which:

5

FIG 1A very schematically illustrates a mobile communication system, e.g. GSM, in which an MS can communicate with an MSC via the BSS on a non-transparent connection and wherein the inventive concept is implemented between BSC and BTS,

10

FIG 1B very schematically illustrates one example on how the invention can be implemented in GPRS,

15

FIG 1C very schematically illustrates another example on how the invention can be implemented in GPRS,

FIG 2 illustrates a RLP frame,

20

FIG 3 illustrates a L2R Packet Data Unit,

FIG 4A shows the FSI values assigned to the E2 and E3 bits in the modified V.110 80 bit frames,

25

FIG 4B is a table illustrating the modified CCITT V.110 80 bit frame for non-transparent data,

FIG 5 is a block diagram illustrating the functional units of a non-transparent GSM traffic channel on different protocol levels modified according to the invention,

30

FIG 6 is a flow diagram of the inventive procedure on the uplink towards a switching arrangement,

FIG 7 is a flow diagram describing the inventive procedure on the downlink towards the Base Transceiver Station, and

5 FIG 8 is a flow diagram describing the procedure on the downlink more in detail.

#### DETAILED DESCRIPTION OF THE INVENTION

In general the description of the various embodiments is based on  
 10 circuit switched data, i.e. systems supporting communication of circuit switched data. However, similar solutions are also implementable for mobile communication systems supporting communication of packet switched data, like for example GSM GPRS (General Packet Radio Service), P-PDC (Packet-Personal Digital  
 15 Communications), ADCD etc. In general terms the solution to the problems initially referred to, in the uplink direction, consists in filtering the input from the radio interface in order to distinguish whether a frame is correctly received from a mobile station, in the following denoted an MS, or not.

20

In the circuit switched data services no CRC (Cyclic Redundancy Check) is applied in the baseband processing on the Channel Coding Blocks (CCB) as it is done for speech for detecting bad frames. Instead a higher level protocol between the MS and the IWF, in or  
 25 associated with a Mobile Switching Center MSC, uses RLP frames with CRC to detect bit errors in the RLP frames.

25

In one particular embodiment the RLP checksum is used in the Base Transceiver Station BTS. That allows to filter out all the bad frames, which for non-transparent data means all frames with one  
 30 or more bit errors and this increases the efficiency even more than is provided for through using DTX alone.

30

The RLP checksum is advantageously used in the IWF and MS in order to evaluate if a frame is error free. If it contains errors, no frame was sent or it was corrupted over the radio interface and it will then be re-transmitted. For asymmetrical services (an  
5 asymmetrical time slot TS) the non-used uplink TSs are known to the BTS and therefor the BTS will not have to send on any frames at all.

(In state of the art systems the BTS sends idle frames over the  
10 allocated CS (circuit switched) channel.) This implies also a change in the BTS TRAU protocol since the BTS controls each sub-channel in the TRAU by a symmetrical inband control protocol, the definition of which however not being part of the present invention.

15 For 9.6 kbps data there is a one-to-one mapping between the frames over the radio interface (Channel Coding Blocks) and the RLP frames. For 4.8 and 14.4 kbps data this is not the case since the RLP frame here consists of two Channel Coding Blocks. Thus,  
20 buffering must be applied for such data having as a consequence a delay of 20 ms. (cf. GSM 05.03)

Particularly, for 4.8 kbps data there is a strict mapping between RLP and the radio interface (CCB) giving an additional delay that  
25 can be between 0 and 20 ms depending on the phase of the radio interface timing.

For 14.4 kbps there is no such mapping. Instead an inband-  
30 signalling is used, two half RLP-frames being marked through a bit. This does not give any extra delay.

The invention will in the following be further described with particular reference to the GSM system, although the inventive

concept also is applicable to other digital mobile communication systems. Furthermore it particularly relates to a communication system using Time Division Multiple Access (TDMA) although it is applicable to systems using other multiple access methods such as CDMA and FDMA. Figs. 1B and 1C very schematically illustrate how the invention can be implemented in GPRS.

Fig. 1A schematically illustrates the functioning of the GSM system in which a Mobile Switching Center MSC 40 is responsible for the connection of incoming and outgoing calls and which acts as a switching arrangement over a public switched telephone network in general and the application of the inventive concept thereto for one embodiment. In addition thereto it handles functionalities characteristic for mobile communications such as for example Subscriber Location Management etc.

Mobile station MS 10 is connected to MSC 40 over a Base Station System BSS 25 which in GSM comprises a Base Transceiver Station 20 and a Base Station Controller BSC 30. The GSM system implements TDMA traffic as sent in TDMA frames over the radio path. A TDMA frame comprises a number of time slots in each of which an information packet is sent as a radio frequency burst. The channel structures which are used on the radio interface of the GSM system are for example defined in the GSM Recommendation 05.02. In the GSM system a data link is established between a Terminal Adapting Function TAF 11 (in MS) and a network adapting means InterWorking function means IWF 41 in a fixed network, mostly in or in association with the MSC 40. The data link is in this embodiment a circuit switched connection serving a number of traffic channels from the radio interface throughout the connection. For GSM the data link in data transfer is V.110 rate adapted, V.24 interface compatible, UDI coded digital full duplex connection. The V.110 connection is a digital transmission channel, cf. CCITT



Recommendation Blue Book V.110. The Terminal Adapting Means TAF 11 adapts a data terminal TA (Fig. 5) connected to the MS for the V.110 connection which here is established over a circuit switched connection using one or more time slots or traffic channels. For  
 5 14.4 kbps other protocols are used. Therefore any detailed description will differ; however, the principles remain the same and it should be obvious from the detailed description how it can be implemented to e.g. 14.4 kbps.

10 The IWF adapts the V.110 connection to another V.110 network such as an ISDN or another GSM network or to another transit network, e.g. PSTN. The traffic channel moreover uses Forward Error Correction (FEC) channel coding, having as an object to reduce the effect of transmission error over the radio path. The GSM system  
 15 implements convolution coding according to GSM Recommendation 05.03. A full-rate GSM traffic channel uses data rates of 14.4 kbps, 9.6 kbps, 4.8 kbps and 2.4 kbps.

Between the BSC 30 and IWF 41 in GSM the so called A-interface is  
 20 used and according to the invention packet switched transmission is enabled either between BSC, also called a (second) switching arrangement and base station BTS or between BTS and MSC also denoted a (first) switching arrangement in the general description of the invention. This relates to two different embodiments.

25 According to the invention, packet switched transmission is at least introduced between BTS 20 and BSC 30. The terminal interface between TAF 11 and the data terminal equipment (not shown) and the interface between the IWF 41 and for example an audio modem 42  
 30 (Fig. 5) meet the requirements of CCITT V.24 and in Fig. 5 the terminal interface is denoted L2. The L2R protocol (Layer 2 Relay) and the RLP (Radio Link Protocol) are both at the TAF 11 and IWF 41 at both ends of the connection. In addition thereto the

connection comprises different kinds of Rate Adapting Functions (RA functions) of which RA 1' is provided between TAF 11 (MS/TAF 10) and, according to the embodiment specifically described and which permits packet based communication between BTS and BSC, in the TRAU 31 (cf. Fig. 5). (In an alternative implementation RA1 and RA1' are also provided in CCU 33.)

RA 1 is provided between the IWF 41 and, according to the illustrated embodiment, TRAU 31. Furthermore RA 2 is provided between TRAU 31 and IWF 41. Moreover a further Rate Adapting function RAX is provided between CCU 32 and TRAU 31. The Rate Adapting functions are defined in the GSM Recommendations 04.21 and 08.20 (RA 1, RA 2, RA 1'); RAX and the additional introduction of RA 1' and RA 1 in TRAU 31, is provided for through the present invention, as well as the exclusion of RA 1 and RA 1' in CCU 32.

Communication between CCU 32 and TRAU 31, is defined in GSM 08.60 which however is affected through the present invention. The L2R (Layer 2 Relay) functionality for non-transparent protocols is for example defined in GSM Recommendation 07.02. L2R packs user data and status information originating from the terminal interface into 200-bit, 25 octet lines PDUs (Protocol Data Units) which for example are illustrated in Fig. 3. The octets are numbered 0-24, wherein octet 0 is transmitted first. The bits in the octets are numbered 1-8, bit 1 is being transmitted first. In a PDU the octet may comprise a status octet, a character (higher layer data) or filler bits. Octet 0 is always a status octet. The status octet comprises 3 bits SA, SB and X for the status of the V.24 connection and 5 bits indicating the number of data octets succeeding the status octet and in addition thereto the special indications of the data octets, e.g. empty, PDU. In the figure a status octet 0 is succeeded by three data octets. Thereafter a new status octet 4 follows.

In Fig. 2 an RLP frame is schematically illustrated. An RLP frame consists of a header, an information field and a Frame Check Sequence (FCS) field. It has a fixed length of either 240 or 576 bits. The size of the components depend on the radio channel type, RLP version and on the RLP frame. The basic frame structure of an RLP frame is discussed in GSM 04.22 "Digital Cellular Communication System (Phase 2+); Radio Link Protocol (RLP) for data- and telematic services on the Mobile Station - Base Station System (MS - BSS) interface and the Base Station - Mobile Services Switching Center (BSS - MSC) interface, GSM 04.22 Version 7.0.0 (released 1998). This document is herewith incorporated herein by reference thereto, as are the other documents referred to in the specification. An RLP header carries one of three types of control information, the first being an unnumbered protocol control information (U frame), the second being supervisory information (S frame) and the third being user information carrying supervisory information piggybacked (I+S frame). The header is to be transmitted from the left to the right and the FCS is to be transmitted starting with the highest order term and the order of bit transmission for the information field is from the left to the right. The FCS is further explained in chapter 4.4 of the above mentioned document (GSM 04.22).

25 L2R PDU is packed in an RLP frame as discussed above. As referred to earlier in this application, and in the above mentioned GSM 04.22, RLP is a balanced HDLC type data transfer protocol with a frame structure in which error correction is based on retransmission of corrupted frames at the request of the receiving party. The RLP protocol extends from the TAF (in MS) to the IWF. For a 240 bit RLP frame the header field comprises 16 bits, the information field 200 bits and the FCS 24 bits. The header and the

information bits also depend on RLP version. The 200 bit L2R PDU is packed in the information field.

The above mentioned GSM Specification 08.20 specifies the interface between IWF and BSS. In the section 14 "Support of Non-Transparent Bearer Services" the TCH/F 9.6 and TCH/F 4.8 kbps channel codings are discussed, explaining that in case of non-transparent services the RA1/RA1' Rate Adapting function performs the same mapping as it is known from transparent services using 12 and 6 kbps radio interface data rates with a modification for the non-transparency. The E2 and E3 bits in the modified CCITT V.110 80 bit frames as shown in Fig. 4B are used to indicate each consecutive sequence of CCITT V.110 80 bit frames corresponding to the four modified CCITT V.110 60 bit frames received in one radio interface frame. This allows 240 bit radio link protocol frames to/from the MSC to be aligned with the 4x60 bit frames encoded by the radio subsystem channel coder as a single unit, cf. GSM 05.03. The 8 bits consisting of the E2 and E3 bits in one of the above sequences is referred to as a Frame Start Identifier FSI. The FSI value is 00 01 10 11, which value is assigned to the E2 and E3 bits as shown in Fig. 4A. This alignment possibility assists in facilitating the implementation of the present invention, here in the GSM system.

Fig. 5 was already discussed above and is a block diagram illustrating MS/TAF 10, BSS 25 and MSC/IWF 40 illustrating implementation of the invention to the GSM system supporting circuit switched data over the air interface wherein packet based communication is introduced between the base station (BTS) and the BSC (here forming the (second) switching arrangement). In an alternative implementation which is very advantageous, packet based transmission can be implemented all way from the base station (BTS) up to the MSC 40 (the (first) switching

arrangement). In that case the additional features as illustrated in Fig. 5 are introduced into the MSC/IWF block 40 instead. In other aspects, the functioning is similar. This means that the functionalities introduced into TRAU 31 (Rate Adapting functions RA 1', RA 1 and RAX) are introduced into MSC/IWF block 40, particularly into the IWF 40. However, with the implementation of Fig. 5, the RLP FCS is calculated in BTS (CCU). Alternatively radio quality measurements are performed. However, in one embodiment radio quality measurements are performed in addition to the calculation of the RLP checksum.

Fig. 1B is a figure similar to Fig. 1A but referring to GPRS. Mobile station 10A communicates via BSS 25A with serving GPRS Support Node (SGSN) 40A which acts as a switching node similar to MSC. BSS 25A includes a BTS 20A and a BSC 30A. In this embodiment PCU (Packet Control Unit) 41A is provided at the BSC site, cf. GSM 03.60 V5.2.0. in general, section 12 (12.5) in particular. Information is transferred as PCU frames which are an extension to the TRAU-frames defined in GSM 08.60. According to the invention packet switched (PS) transmission is introduced between BTS 20A and BSC 30A. BSC 30A in this embodiment contains the PCU functionality.

Fig. 1C shows an alternative implementation, cf. GSM 03.60 V5.2.0, section 12,5, wherein an MS 10B communicates via BSS 25B with SGSN 40B. In this case PCU 41B is provided in SGSN 40B, why SGSN here is denoted the (first) switching arrangement. Packet switched transfer (PS) of data is here according to the invention introduced between BTS 20B and SGSN 40B. GPRS is e.g. described in the document GSM 03.60 V.5.2.0 and in Draft TS 100 960 V5.0.0 (1998-01) (GSM 03.60 Version 5.0.0). (For GPRS no filler frames are sent from SGSN to BSC as in the case described with reference e.g. to Fig. 8 for GSM.)

Fig. 6 is a block diagram describing the implementation of the inventive concept to the GSM system for circuit switched data on the uplink. The embodiment describes an implementation when packet based communication is introduced on the fixed link between BTS and BSC. First a non-transparent data connection between MS/TAF and MSC/IWF is established using one or more time slots over the radio interface, 100. In an advantageous implementation it is examined whether it is a symmetrical time slot, 110, and if not, no frames are sent over the fixed packet based (terrestrial) link, 111. This means that, at establishing a non-transparent data connection information is obtained about whether the time slot is symmetrical or not at an early stage. This examination is however not a requirement for the functioning of the present invention but merely constitutes an advantageous implementation. However, supposing that this functionality is implemented, and if it is established that the time slot is symmetrical, then means are established for detecting correctly received RLP frames, i.e. that the MS/TAF sent an RLP frame and that it was received without any bit errors, 120. Such a functionality is novel in the base station which checks on higher levels protocol than hitherto known to be used by BTS.

The RLP frame is then received over the radio interface, 130. Thereupon is checked if the RLP frame contains any errors, 140. Particularly the RLP checksum is examined to settle if it is correct. Alternatively radio quality measurements are performed, or both. If the RLP frame contains errors, the RLP frame is discarded, 152, which means that no frame is sent over the packet based terrestrial link.

If on the other hand the RLP frame contains no errors, the RLP frame is sent over the fixed packet based link, 151. The procedure is then repeated for subsequent frames.

- 5 This discloses the procedure on the uplink and bad frames can be disposed of already in the base station BTS instead of in the MSC. Advantageously the RLP checksum (RLP FCS) is used in BTS. This can be done without any trial decoding since the channel coding gives the RLP length and also which FCS that is used, cf. "RLP frames are sent in strict alignment with the radio transmission"; GSM 10 04.21 and RLP frames are of a fixed size of 240 (TCH/F 9.6 channel coding) or 576 bits (TCH/F 14.4 channel coding) cf. earlier remarks relating to 4.8 kbps and 14.4 kbps data.
- 15 Step 120 of the flow diagram is in one embodiment omitted since the RLP frame length and the checksum implicitly are given as the connection is established (step 100).

In an alternative embodiment consisting in using radio quality data, the channel type is also known from the establishment of the 20 data connection.

For data 4.8 and 14.4 kbps it is possible to buffer a Channel Coding Block in BTS, i.e. await the subsequent CCB in order to get 25 a full RLP-frame. However, this results in an extra delay of 20 ms. The preferred situation would be if it was possible to send each CCB as soon as it is received and packetize it into for example an IP-packet (or to use ATM or Frame Relay or other packet based solutions). If CRC calculations are initiated already at 30 reception of the first CCB, it can not be established if the Whole RLP-frame was corrupt until the second CCB is received. In other words, the first CCB is already sent out. In an alternative

implementation handling this problem, this approach can be implemented in combination with radio quality measurements.

In Fig. 7 the corresponding procedure on the downlink is described. It also discloses an embodiment in which packet based transmission is introduced between BSC (TRAU) and the base station (BTS). However, as referred to earlier, packet based transmission can be provided for between MSC and BTS in which case the functionalities (specific for the invention) of the TRAU are performed in the MSC instead. However, returning to Fig. 7, it is supposed that a non-transparent data connection between MS/TAF and MSC/IWF is established, 200, then is established whether there is any data to send in MSC/IWF, 210. If yes, an RLP frame is built and sent to TRAU (in BSC) over the A-interface, 220. The RLP frame is then detected in TRAU and from there it is sent over the fixed packet based link to BTS, 230. If however it in step 210 is detected there is no data to be sent in MSC/IWF, an RLP filler frame is built and sent to TRAU over the A-interface, 221. In the alternative embodiment in which packet based data is introduced between MSC and BSC, there is no need to build an RLP filler frame. However, supposed there is only introduced packet based transmission between the BSC and BTS, the RLP filler frame is detected in TRAU (BSC) and no packet is sent over the packet switched link to BTS, 222. The procedure is then repeated for subsequent frames.

In Fig. 8 the procedure on the downlink is described more in detail for GSM and wherein packet based communication is introduced between BSC and BTS. It is first supposed, 300, that an RLP frame is sent from IWF to MS. The transportation of the RLP frame takes place on a lower layer in the form of synchronous V.110 frames. This is handled by RA 1 as disclosed in Fig. 5. RA 1 gives a synchronous stream of V.110 frames with a bit rate of 16



kbps which corresponds to a bit rate of 9.6 kbps over the air. Subsequently the spare bandwidth or the remaining bandwidth is filled by one's ("1") (for example). The reason therefor is that a 64 kbps channel always is allocated between MSC and BSS. This is handled by RA 2 (cf. Fig. 5), 310. Subsequently the TRAU unit (in BSC) detects V.110 frames. Rate Adapting functionality RA 2 performs this functionality using the synchronization pattern on the allocated 64 kbps channel, 320.

10 The TRAU unit, in state of the art systems, packs data corresponding to four V.110 frames in one TRAU frame which is the format used between the base station BTS (CCU) and TRAU. In state of the art systems TRAU has no functionality to see which is the content of the V.110 frames. This means that TRAU for example does not know if it is a transparent or a non-transparent service. (In the present invention the above packing into a TRAU frame is replaced through packing RLP frames into an IP-packet.)

20 If a packet based solution is defined, each V.110 frame can be sent in a packet, for example an IP-packet, but still this information will not be provided. According to another solution four V.110 frames are also packed into an IP-packet, which then is sent. However, in order to increase the transmission efficiency through the use of DTX, a functionality must be provided which can establish the content in the V.110 frames.

30 Thus a function that can read the E2, E3 bits in the V.110 frames and which detects the FSI sequence, in other words can find an RLP frame, is needed. Alternatively, to inform TRAU that it is a non-transparent service, information thereon can be provided in signalling at call set up. However, normally the other method works satisfactorily since the E-bits in case of a transparent service are given a constant value indicating bitrate.

This was discussed with reference to figs. 4A, 4B. Thus in a subsequent step the E2, E3 bits in the V.110 frames are read and the FSI sequence is detected which means that an RLP frame is found, 330. This function is performed in a similar manner to that as performed by RA 1 in BTS. Furthermore the RLP frame is packed in the format used for transmission over the air (except for the channel coding which is introduced by the FEC functionality). This corresponds to the RA 1' functionality, 340. Then information is available for sending in a packet of 4x60 bits (corresponding to a 240 bit RLP frame and four 80 bit V.110 frames, totally 320 bits, which means that the V.110 synchronisation is what differs). Thus a 240 bit RLP frame and four 80 bit V.110 frames are arranged in a packet. The RAX functionality as shown in Fig. 5 adds the packet overhead given by the used standard, for example IP, 350. TRAU then checks the E1 bits in the RLP frame to find out if it contains user data or if it is an idle RLP frame. If it is a "1" then it is an idle RLP frame, 360. In BTS/CCU the RAX functionality is provided for unpacking the IP packet and regenerating V.110 frames, 370.

The functionality synchronizing the V.110 bit stream with an RLP frame, i.e. RA 1, will here be simplified since it is known that an IP packet always represents an RLP frame. E1, E2 and E3 are not sent in this direction. Finally the DTX functionality in BTS/CCU will be a step of determining if a packet has been received. Then it has to be sent. If no packet is received, the transmitter is to be turned off, 380.

The detailed procedure on the uplink will not be described in a flow diagram. The differences as compared to the used standards is that BTS/CCU knows that all frames that are received comprises an RLP frame since there are no E bits send over the air. The

detection is here performed to detect whether it is an RLP frame that has been sent or not and also to detect if it contains any bit errors. This is advantageously performed using the RLP checksum as referred to earlier.

5

Alternatively radio quality data can be used. (This can also be used as a complement to the RLP checksum embodiment.) A threshold can then be applied on the received Channel Coding Block to distinguish whether the MSS sent some bursts or not. The threshold has to be based on soft information from the Equalizer and Channel Decoder. The threshold may for example be defined to rule blocks with bursts of very low energy, i.e. the MS transmitter is turn off. However, in case there is interference, this method can be provided with soft quality measurements from the Channel Decoder. Since this method only relies on soft information, in an advantageous embodiment, an offset of the threshold towards not dropping the frames in order not to loose any good frames is used. The efficiency may be somewhat lower than that as provided for by the solution using the RLP checksum.

20

In Fig. 6 the functionality on RLP level (RLP FCS) comprises a calculation of the RLP checksum. On the downlink this functionality is advantageously implemented but it is not necessary. If the RLP checksum is calculated on the downlink, this is for example done in order to avoid to send corrupt data over the air in case there have been bit errors on the fixed transmission. The remaining steps correspond to those as described above with reference to the downlink procedure but in the opposite order.

25

30

As referred to earlier, the invention is likewise applicable to a digital mobile communication system supporting communication of packet data, for example GPRS which is the GSM packet data

service, PPDC which is the packet data service for PDC etc. The used communication protocol RLP is for GPRS then replaced by the RLC protocol, the interworking function means comprise a PCU (Packet Control Unit), the MSC node corresponds to the SGSN node (Serving GPRS Support Node) etc. as referred to in Figs 1B, 1C. In other aspects the solution is similar. Statistical multiplexing of non-transparent data is then being implemented on a radio interface between mobile stations and base stations.

Moreover, the invention is applicable to different kinds of systems and particularly may circuit switched transfer of data e.g. for GSM (or a similar system with a circuit switched core network) be implemented as well as packet switched transfer of data over the radio interface for such a system with a circuit switched core network.

In addition thereto it is applicable in the case circuit switched transfer of data over e.g. the radio interface is implemented for a system (e.g. GPRS) having a packet switched core network.

The invention is of course not limited to the explicitly illustrated embodiments but it can be varied in a number of ways within the scope of the appended claims.



CLAIMS

1. A mobile communication system supporting communication of data  
5 and comprising at least one base station connected to a switching  
arrangement over a connection and using a communication protocol  
for communication between a mobile station and the switching  
arrangement,

c h a r a c t e r i z e d b y

10 the connection between the base station and the switching  
arrangement supporting packet switched communication of data, and  
means for detecting in the base station if data frames sent from  
the mobile station are correctly received over the air interface,  
means for sending only data frames detected as correctly received  
15 on to the switching arrangement using the packet switched  
connection between the base station and the switching arrangement.

2. The system of claim 1,

c h a r a c t e r i z e d b y

20 non-transparent communication of data transported as data frames  
being established on the uplink from the mobile station.

3. The system of claim 1 or 2,

c h a r a c t e r i z e d b y

25 the means for detecting comprising means for calculating a frame  
checksum for a received data frame.

4. The system of claim 3,

c h a r a c t e r i z e d b y

30 the quality of the radio transmission being detected in the base  
station to detect if a data frame is correctly received.

5. The system of claim 1,

characterized by  
the switching arrangement being a Mobile Switching Center (MSC).

6. The system of claim 1,  
5 characterized by  
the switching arrangement being a Base Station Controller (BSC),  
the base station being a Base Transceiver Station (BTS), packet  
switched communication of data being supported at least on the  
uplink between the Base Transceiver Station (BTS) and the Base  
10 Station Controller (BSC).

7. The system of claim 6,  
characterized by  
the BSC including transcoding and adapting means for communication  
15 with an interworking function of a mobile switching center which  
comprises means for building frames for transportation of data,  
the transcoding and adapting means detecting if frames received  
from the mobile switching center contain data and sending only  
data frames on to the base station.

20 8. The system of claim 1, 6 or 7,  
characterized by  
packet switched communication of data being supported between the  
base station and the switching arrangement on the downlink.

25 9. A mobile communication system supporting communication of  
packet data and comprising at least one base station connected to  
a switching arrangement over a connection and a using  
communication protocol for communication between the mobile  
30 station and the switching arrangement,  
characterized by  
the connection between the base station and the switching  
arrangement supporting packet switched communication of data,

means for detecting in the base station if data frames sent from the mobile station are correctly received over the air interface, and means for sending only data frames detected as correctly received on to the switching arrangement using the packet switched connection between the base station and the switching arrangement.

10. The system of claim 9,  
c h a r a c t e r i z e d   b y  
non-transparent communication of packet data being supported and  
10 wherein packet switched communication is supported on the downlink from the switching arrangement to the base station.

11. A method of transmitting data in a mobile communication system, the method comprising the steps of:

15 - establishing a non-transparent data connection between a mobile station and a switching arrangement, comprising an air interface between the mobile station and a base station and a packet switched connection between the base station and the switching arrangement;

20 - detecting in the base station if data frames sent from the mobile station are correctly received over the air interface; and

- sending only data frames detected as correctly received on to the switching arrangement using the packet switched connection between the base station and the switching arrangement.

12. The method of claim 11,  
wherein the step of detecting comprises using a frame checksum defined in the non-transparent data protocol to establish if the data frames are correctly received.

13. The method of claim 11 or 12,

further comprising the step of:

- performing radio quality measurements in the base station to establish if data frames are correctly received over the air interface from the mobile station.

5

14. The method of claim 12,

further comprising the step of:

- detecting in the base station if a received time slot from the mobile station is symmetrical, and, only if the time slot is symmetrical, sending data packets over the packet switched connection to the switching arrangement.

10

15. The method of claim 11,

further comprising the step of:

- implementing packet switched transmission on the downlink from the switching arrangement to the base station.

15

16. A method of transmitting data in a mobile communication system supporting communication of packet data, the method comprising the steps of:

20

- establishing a non-transparent data connection between a mobile station and a switching arrangement, comprising an air interface between the mobile station and a base station and a packet switched connection between the base station and the switching arrangement;
- detecting in the base station if data frames sent from the mobile station are correctly received over the air interface; and
- sending only data frames detected as correctly received on to the switching arrangement using the packet switched connection between the base station and the switching arrangement.

25

30



17. The method of claim 16,  
wherein the step of detecting comprises using a frame checksum,  
defined in the non-transparent data protocol, to establish if the  
data frames are correctly received.

5

18. The method of claim 17,  
further comprising the step of:

- implementing packet switched transmission on the downlink  
from the switching arrangement to the base station.

10

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

ABSTRACT

The present invention relates to a mobile communication system  
 5 supporting communication of data which comprises a base station  
 communicating with a switching arrangement. A communication  
 protocol is used for communication between a mobile station and  
 the switching arrangement. The connection between the base station  
 and the switching arrangement supports packet switched  
 10 communication and detecting means are provided in the base station  
 to detect if data frames sent from the mobile station are  
 correctly received over the air interface. Means are also provided  
 for sending only data frames detected as correctly received on to  
 the switching arrangement using the packet switched connection  
 15 between the base station and the switching arrangement.

(Fig. 1)



1/9

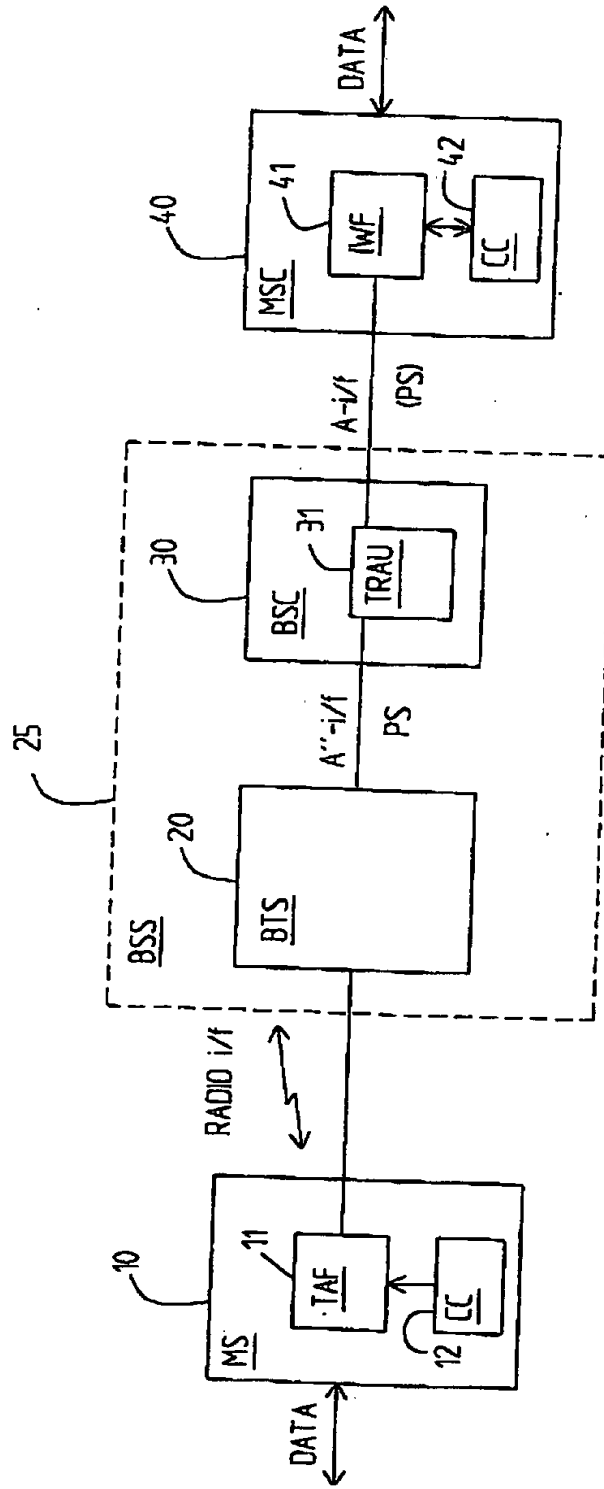


Fig. 1A

2/9

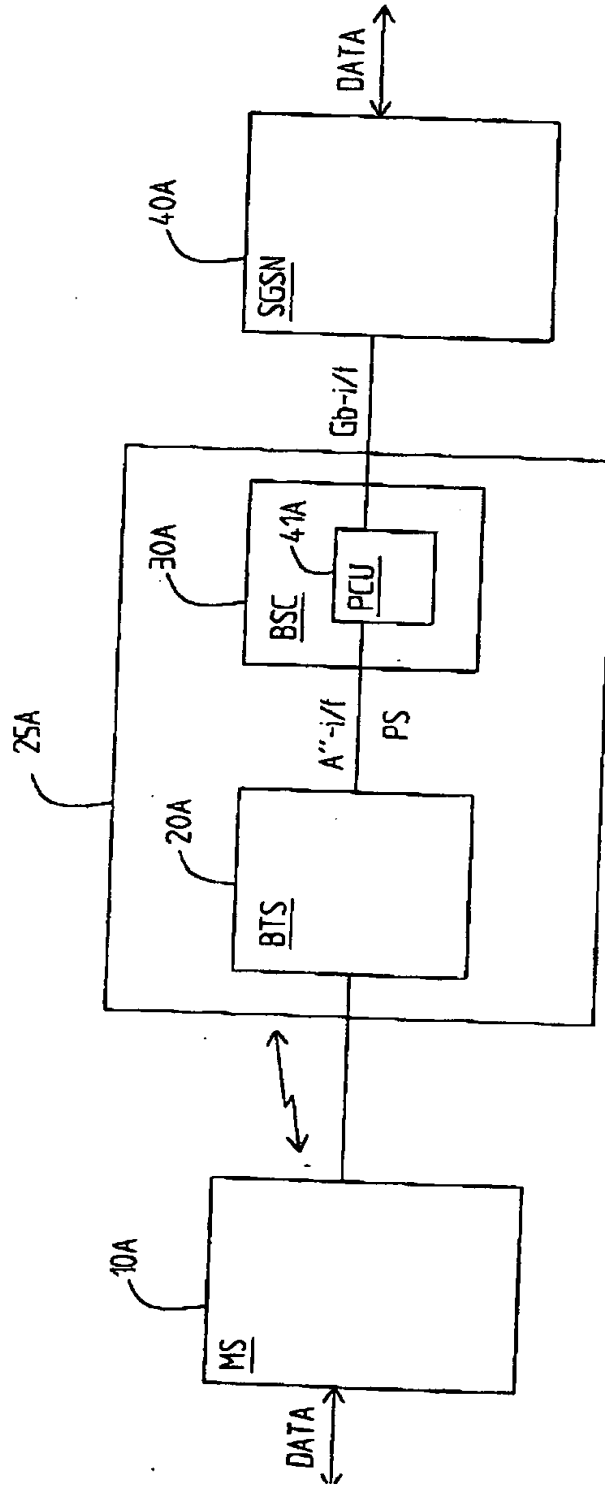


Fig. 1B

3/9

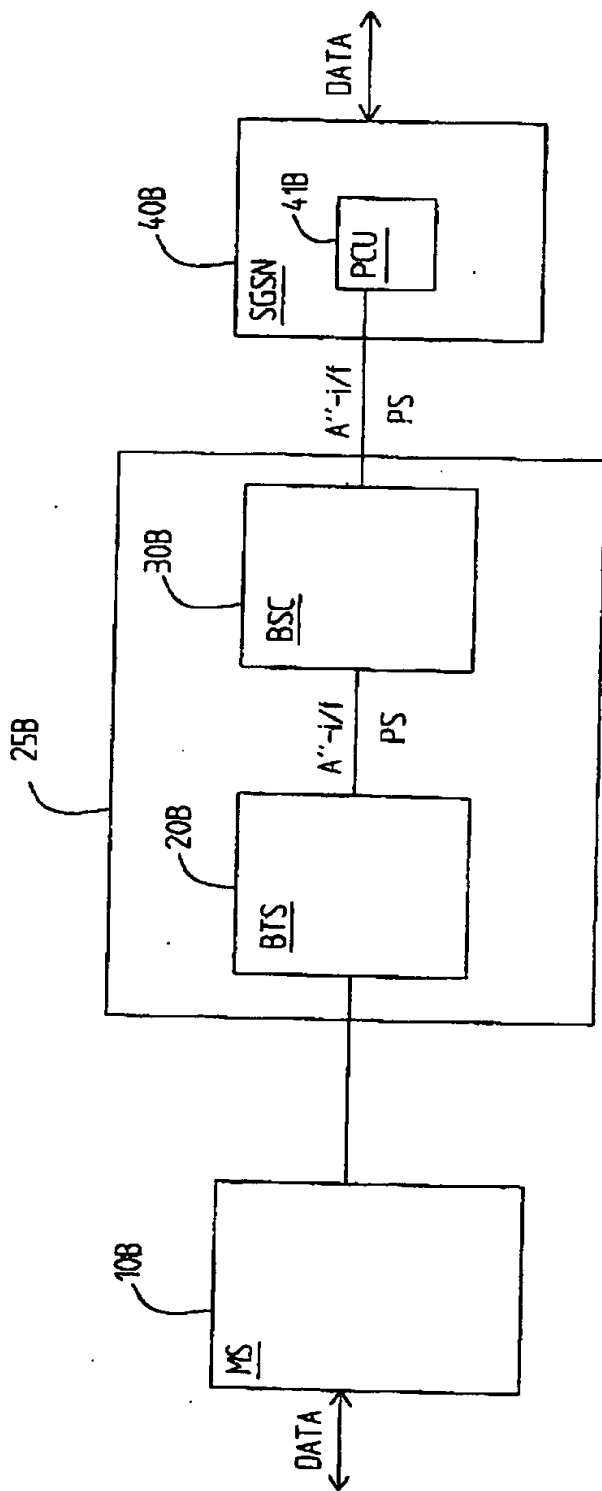


Fig. 1C

4/9



*Fig. 2*

	8	7	6	5	4	3	2	1
0	SA	SB	X	0	0	0	1	1
1	1	1	0	0	0	1	1	1
2	1	1	0	1	0	0	1	1
3	1	1	0	0	1	1	0	1
4	SA	SB	X	1	1	1	1	1
⋮								
n								

*Fig. 3*

5/9

	E2	E3
1:ST MODIFIED CCITT V.110 80 BIT FRAME	0	0
2:ND —————	0	1
3:RD —————	1	0
4:TH —————	1	1

Fig. 4A

OCTET NO.	BIT NUMBER							
	0	1	2	3	4	5	6	7
0	0	0	0	0	0	0	0	0
1	1	D1	D2	D3	D4	D5	D6	D'1
2	1	D7	D8	D9	D10	D11	D12	D'2
3	1	D13	D14	D15	D16	D17	D18	D'3
4	1	D19	D20	D21	D22	D23	D24	D'4
5	1	E1	E2	E3	D'5	D'6	D'7	D'8
6	1	D25	D26	D27	D28	D29	D30	D'9
7	1	D31	D32	D33	D34	D35	D36	D'10
8	1	D37	D38	D39	D40	D41	D42	D'11
9	1	D43	D44	D45	D46	D47	D48	D'12

Fig. 4B

6/9

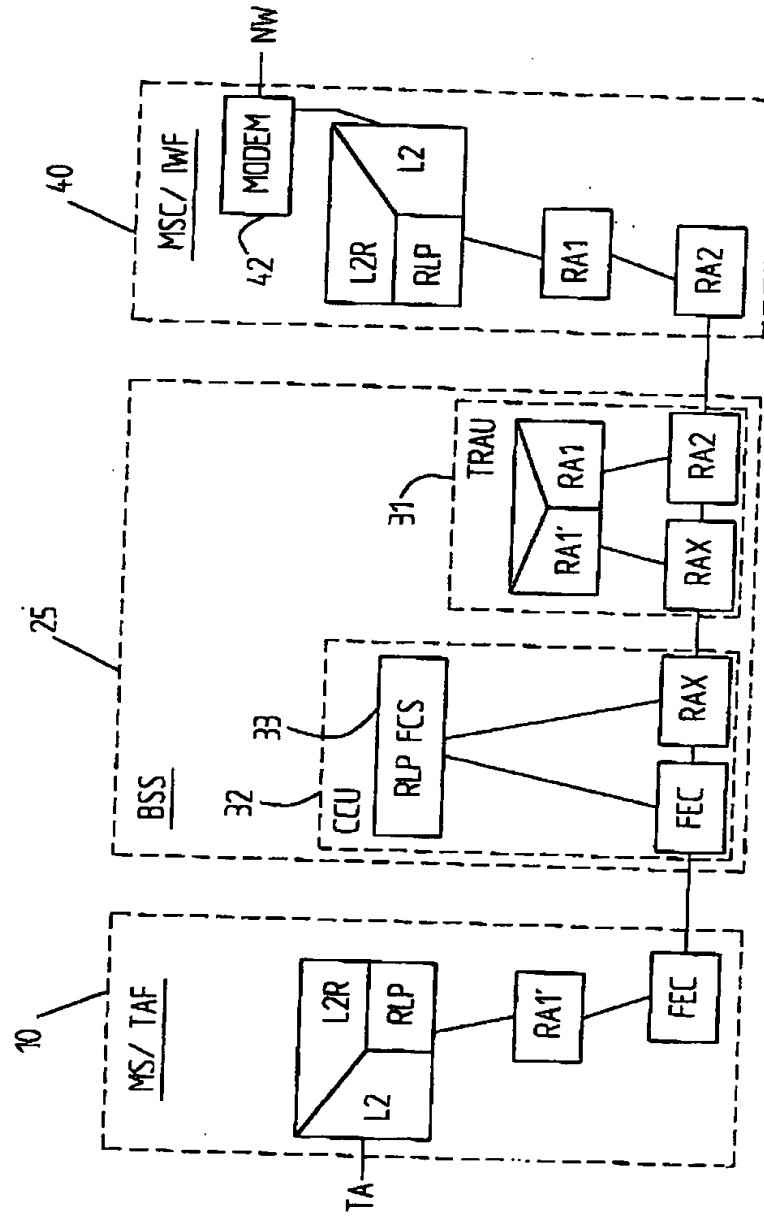


Fig. 5



7/9

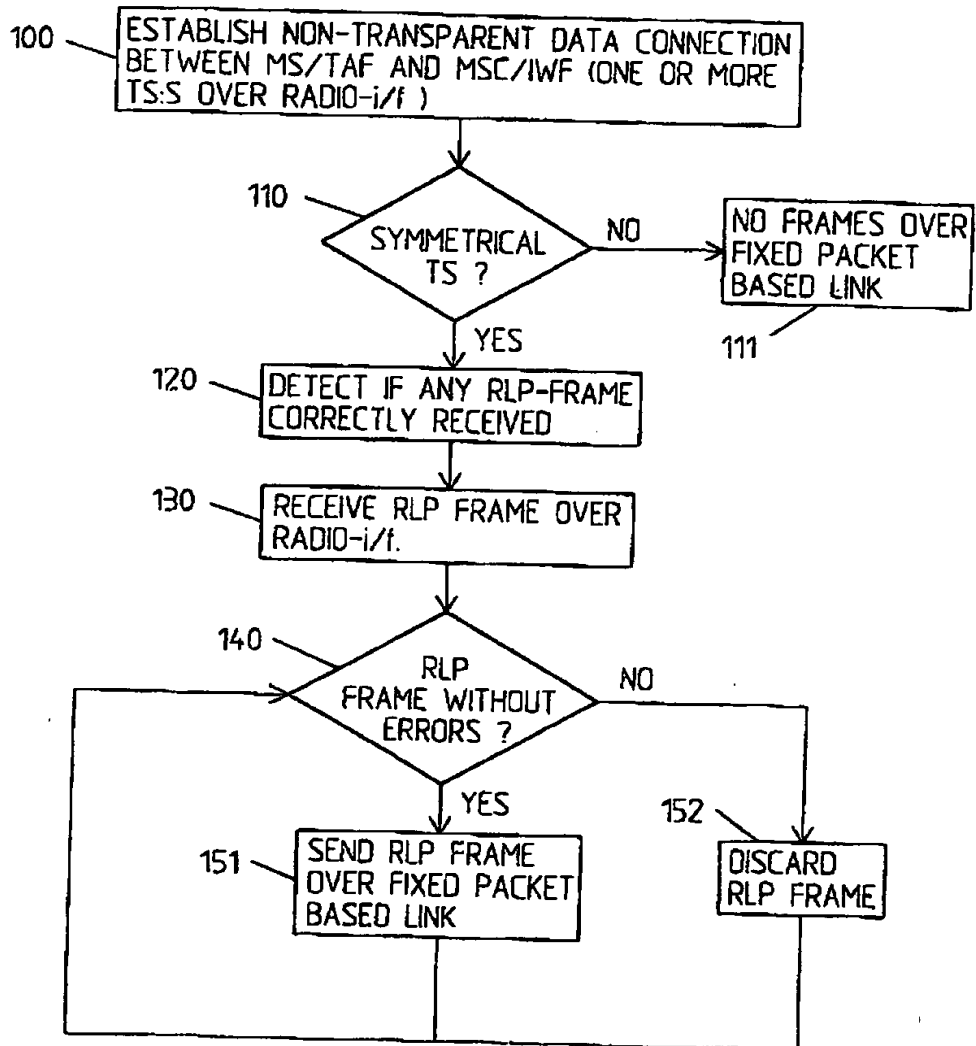


Fig. 6

8/9

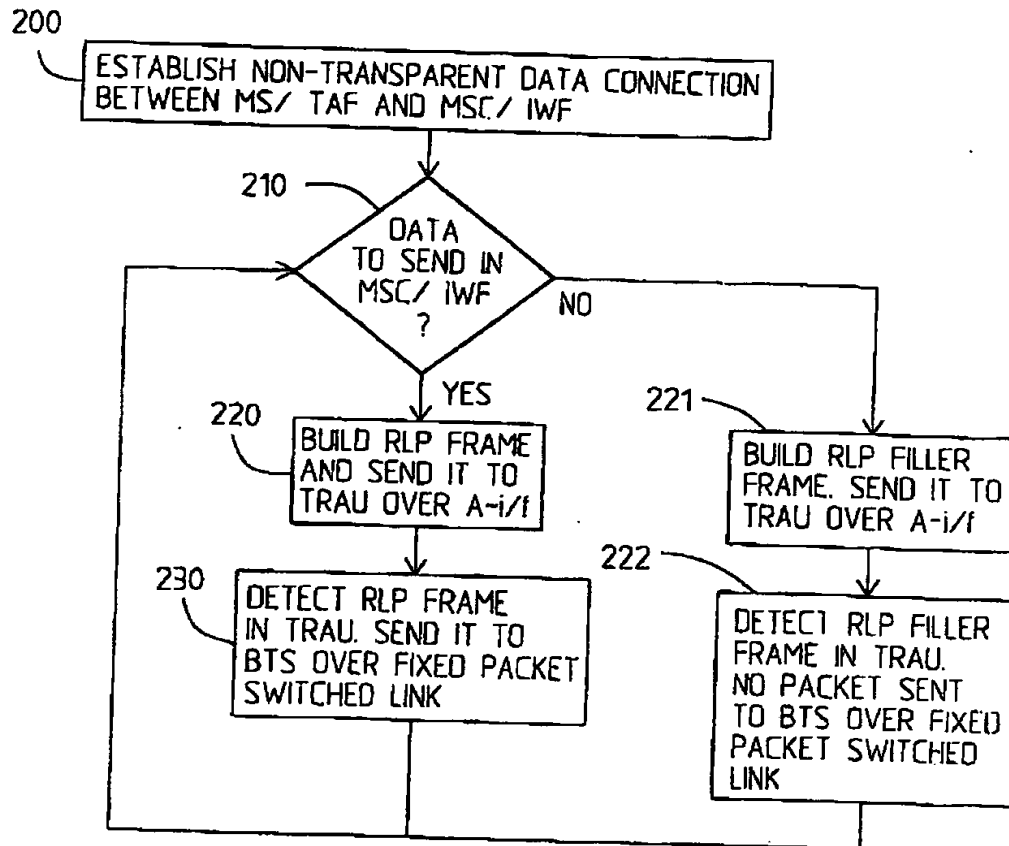


Fig. 7

9/9

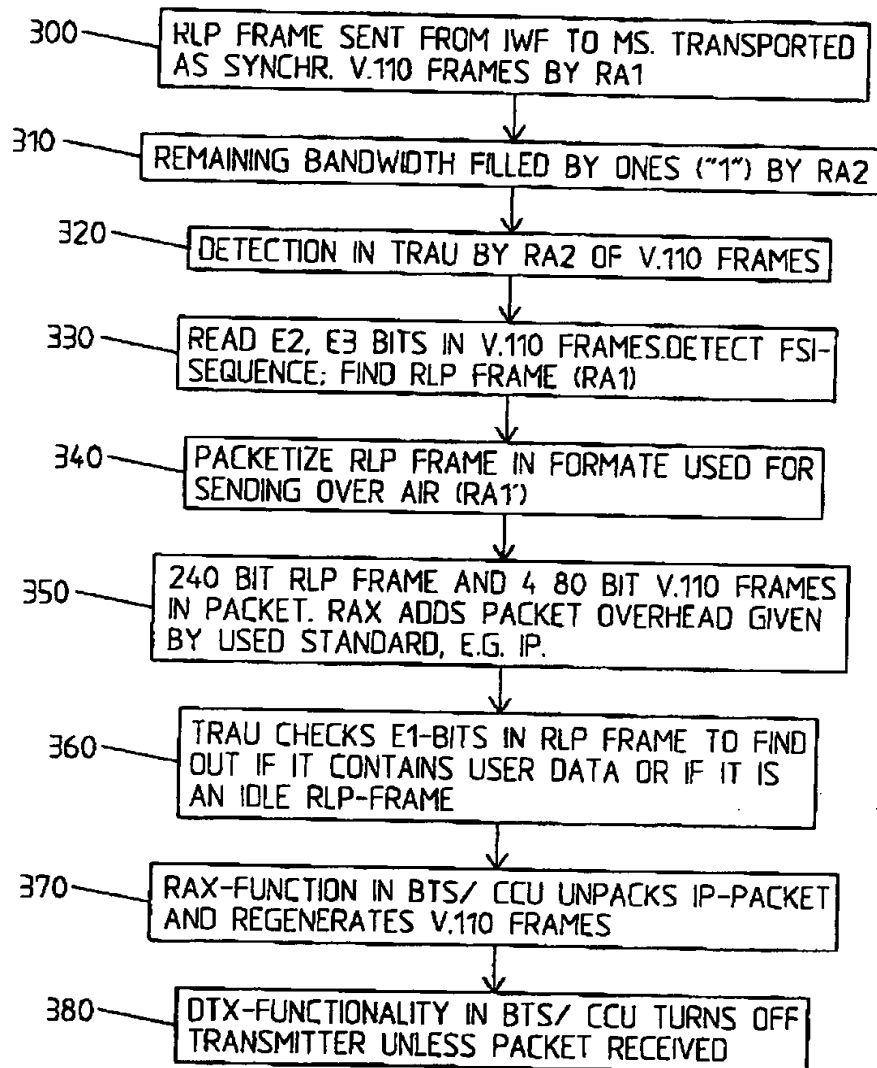


Fig. 8